





- Koruma sınıfı: 0
- İzolasyon sınıfı: F
- Motor mili: Ck 45.
- Kablolar:H05V-K 0.75mm² VDE onaylı.
- Yataklar: Sinter Bronz.

The technical drawing consists of two views of the LED lighting fixture:

- Top View (Left):** Shows the circular base of the fixture. Dimensions include a diameter of 80 mm, a central hole diameter of 36 mm, and a mounting bracket width of 28 mm. Labels indicate cable types: "Kahverengi" (Brown), "Sarı" (Yellow), "Beyaz" (White), "Siyah" (Black), "PVC Kılıf Sıkı" (Tight PVC Sheath), and "Dış Terminal Ø50x29mm, 1A4". A note specifies "Doğru Yönde" (Correct Direction) with an arrow pointing towards the center.
- Side View (Right):** Shows the profile of the fixture. Dimensions include a total height of 171 mm, a mounting arm length of 146.8 mm, and a base diameter of 80 mm. The mounting arm has a diameter of 16 mm and a thickness of 4 mm. The base has a diameter of 80 mm and a height of 35.2 mm. The central lens has a diameter of 29 mm and a height of 35.2 mm. The base also features a 20.2 mm wide section.



MOTOR TİPİ	MOTOR KODU	TEST VOLT. (V)	TEST FREQ. (Hz)	MOTOR PERFORMANS DEĞERLERİ													
				Yüksüz Halde		Kilitli Halde		Maximum Verim Şartlarında				Maximum Güç Şartlarında					
				Devir (RPM)	Akım (Amp)	Moment (Ncm)	Akım (Amp)	Moment (Ncm)	Devir (RPM)	Akım (Amp)	Verim (%)	Çıkış Gücü (W)	Moment (Ncm)	Devir (RPM)	Akım (Amp)	Verim (%)	Çıkış Gücü (W)
BM64P	964.94.009	230	50	17637	0.774	102.59	5.598	22.15	10312	2.209	54.25	239.17	59.55	5566	4.365	44.34	347.12

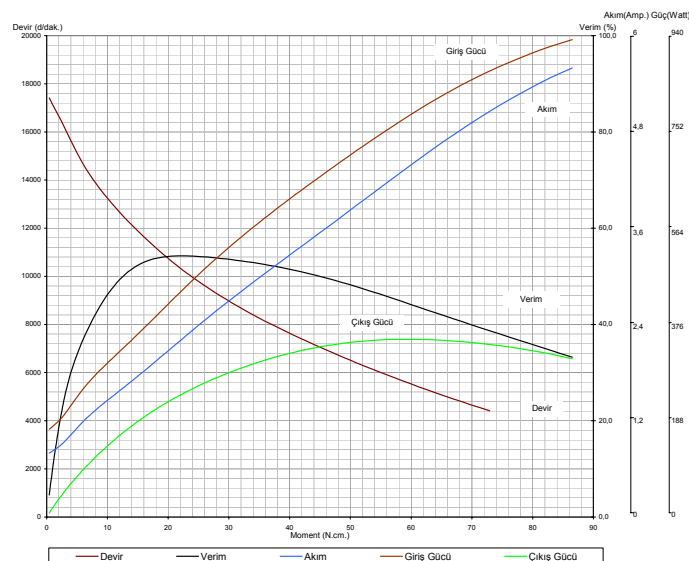

Tel:+90 (212)551 01 00 (7 Lines) Fax: +90 (212) 551 31 67 www.balkanmotor.com e-mail: balkan@balkanmotor.com

