


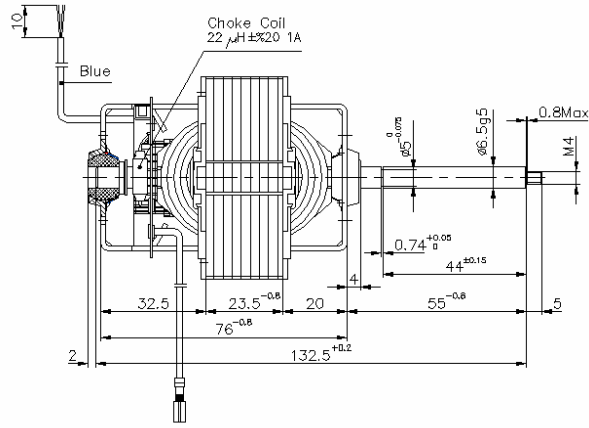


- Protection class: 0
- Insulation class: F
- Motor shaft: Ck45
- RFI suppressor: 22 μ H 1A choke coil
- Cables: H03VV-F 0.50mm² VDE approved
- Bearings: Sinter Bronze.

Universal Motor (BM76D 976.10.004)

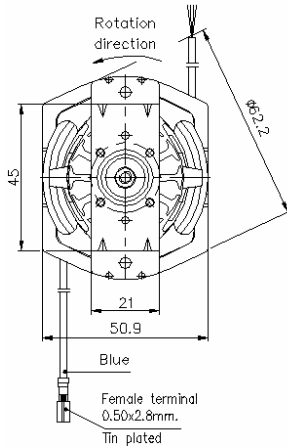

MOTOR TYPE	MOTOR CODE	TEST VOLT. (V)	TEST REQ. (Hz)	MOTOR PERFORMANCE VALUES													
				At No Load		At Stall		At Maximum Efficiency				At Maximum Power					
				Speed (RPM)	Cur. (Amp)	Torque (Ncm)	Cur. (Amp)	Torque (Ncm)	Speed (RPM)	Cur. (Amp)	Eff. (%)	Pout (W)	Torque (Ncm)	Speed (RPM)	Cur. (Amp)	Eff. (%)	Pout (W)
BM76D	976.10.004	230	50	36281	0.566	40.16	3.335	8.4	16844	1.316	49.88	148.12	20.68	9033	2.266	39.09	195.69

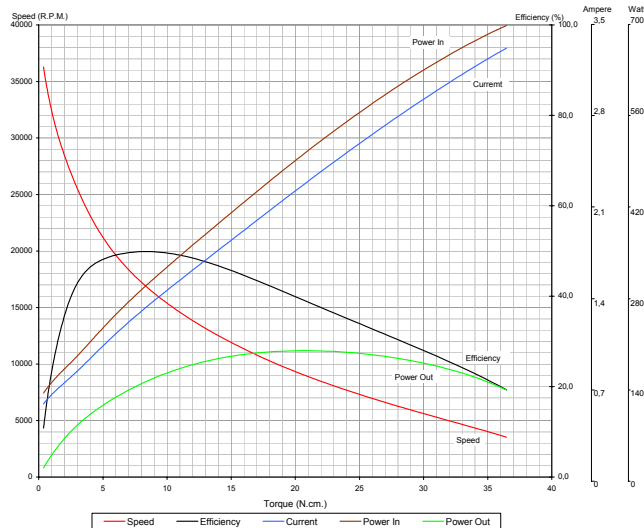

Remarks:
 • Documents here includes only reference values. BALKAN MOTOR A.Ş. has the right to revise them without any prior information.
 • BALKAN MOTOR A.Ş. could modify all its products according to customer requirements.

BALKAN MOTOR SANAYİ VE TİCARET A.Ş.
 Yenibosna Sanayi Caddesi No:21 34530 Bahçelievler/Istanbul/TURKEY
 Tel:+90 (212)551 01 00 (7 Lines) Fax: +90 (212) 551 31 67 www.balkanmotor.com e-mail: balkan@balkanmotor.com

