



Type : BM 34A,B,C,D


POMPA

MAX. TOTAL HEAD : 14m.
 MAX. WATER OUTPUT : 48m³ / h
 MAX. SUCTION LIFT : 6m.
 PUMP BODY : GG 22 Cast Iron
 EMPELLER : Brass
 SHAFT : X20Cr13 Stainless Steel

MOTOR

VOLTAGE : 220V ~ Single Phase
 : 220V/380~ Three Phase
 1HP Induction Motor
 PROTECTION CLASS : IP44
 INSULATION CLASS : B
 SEALING : 10 Bar Mechanical Seal
 MAINTENANCE : Lubrication Free

CENRIFUGAL WATER PUMP

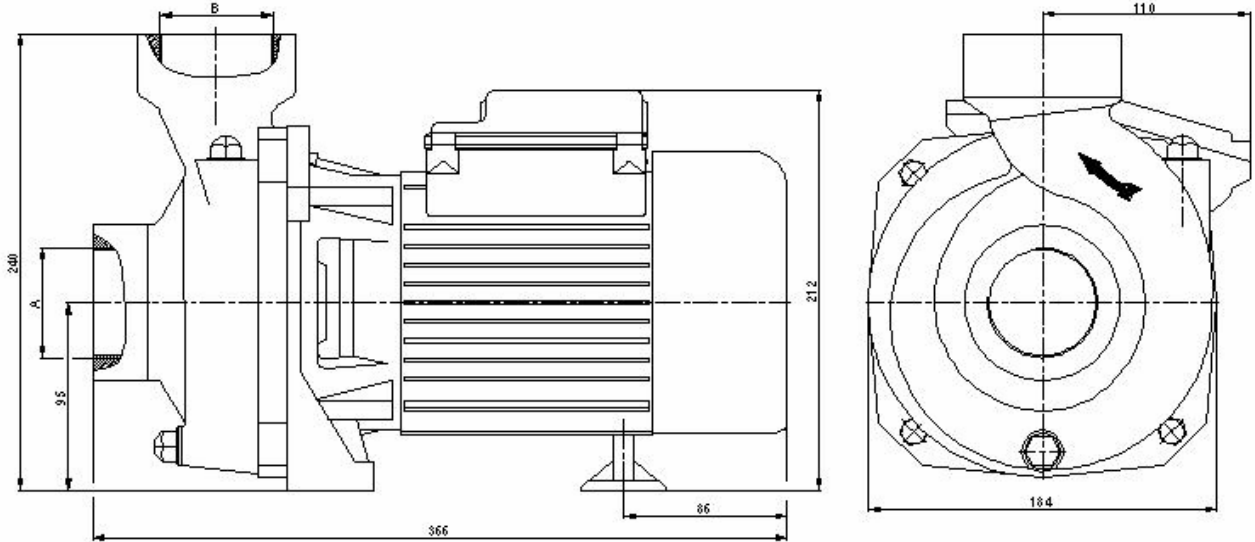

TYPE	POWER HP KW		PHASE	CAPACITY (m ³ / h) / (lt / min.)								INLET A	OUTLET B	
				0	6	12	18	24	30	36	42			48
				0	100	200	300	400	500	600	700			800
				TOAL MANOMETRIC HEAD (m)										
BM34A	1	0.75	1	14.2	13.8	13	11.5	9.6	6.5	3		R2"	R2"	
BM34B			1	12.5	12	11.5	11	10	8.5	7	5	3	R3"	R3"
BM34C			3	14.2	13.8	13	11.5	9.6	6.5	3			R2"	R2"
BM34D			3	12.5	12	11.5	11	10	8.5	7	5	3	R3"	R3"

Remarks:

- Documents here includes only reference values.BALKAN MOTOR A.Ş. has the right to revise them without any prior information.
- BALKAN MOTOR A.Ş. could modify all its products according to customer requirements.

BALKAN MOTOR SANAYİ VE TİCARET A.Ş.

Yeni Bosna Sanayi Caddesi No:21 34530 Bahçelievler/İstanbul/TÜRKİYE

Tel:+90 (212)551 01 00 (7 Lines) Fax: +90 (212) 551 31 67 www.balkanmotor.com.tr e-mail: balkan@balkanmotor.com.tr.

